

Extremely high temperature self-regulating heating cable.

FailSafe Ultimo Inherently Temperature-Safe Heating Cable

- Automatically adjusts heat output in response to increasing or decreasing pipe temperature.
- Can be cut-to-length.
- Inherently temperature safe.
- Suitable for use in safe, hazardous and corrosive areas.
- High power outputs to 100W/m at 10°C.
- Full range of controls and accessories available.

DESCRIPTION

FSU is an extremely high temperature self-regulating heating cable, having an exposure limit of 250°C, energised or not.

Easy terminations, cut-to-length.


Safest ever self-regulating product range for extremely high temperature exposure; will not overheat even when exposed to 250°C when energised or switched off as it is inherently temperature-safe.

ATEX, IECEx & UKEX Approved.

INHERENTLY TEMPERATURE-SAFE

“The inherent ability to self-regulate at a temperature level below the maximum product rating and withstand temperature of the insulating materials, without the need for temperature control.”

Similar competitor self-regulating products are typically limited to a maximum energised temperature, typically 120°C at which point, their retained power output prevent the cable from self-regulating at its own limiting temperatures. All such products require temperature control to ensure their own temperature safety.

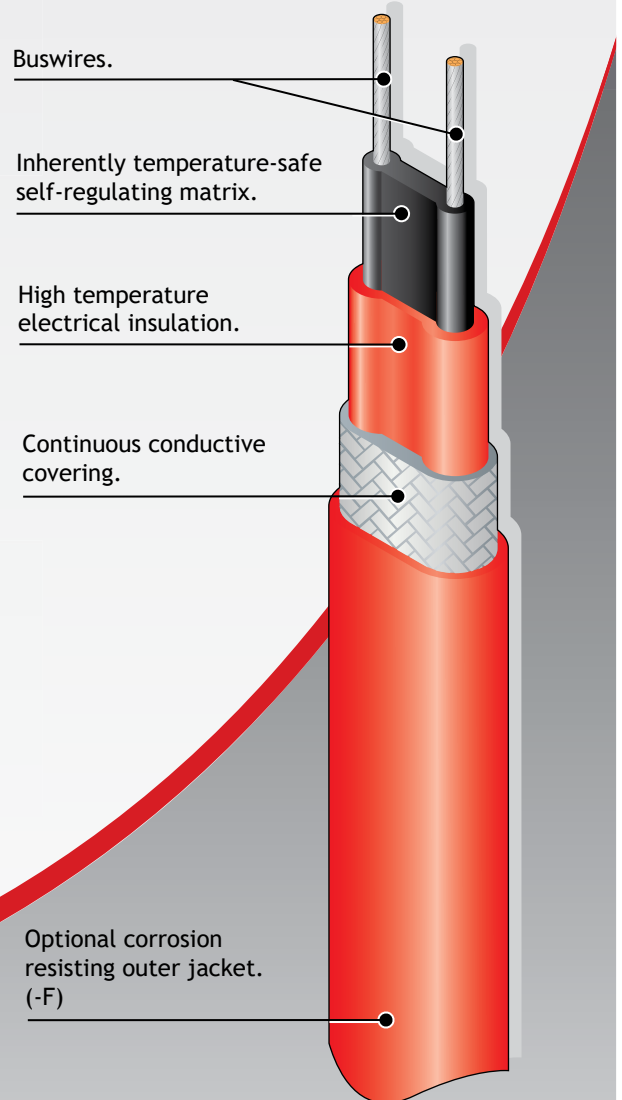

P.G.R. PARTNERS



The Heat Tracing Authority™

SPECIFICATION

MAXIMUM EXPOSURE TEMPERATURE: 250°C (482°F)
(ENERGISED OR SWITCHED OFF)

MINIMUM OPERATING TEMPERATURE: -40°C (-40°F)

MINIMUM INSTALLATION TEMPERATURE: -40°C (-40°F)

POWER SUPPLY: 12 - 277V AC/DC

TEMPERATURE CLASSIFICATION: #
15FSU, 30FSU, 45FSU & 60FSU @ nom 230V - T3 (200°C)
75FSU & 100FSUw @ nom 230V - T2 (300°C)

WEIGHTS & DIMENSIONS:

Type Ref	Dimensions (mm) +/-0.5	Weight kg/100m	Min Bending radius	Gland Size
FSU-N	11.3 x 4.6	11.3	30mm	M20
FSU-NF	12.5 x 5.8	14.6	35mm	M20
FSUw-N	13.6 x 4.8	15.8	30mm	M25
FSUw-NF	14.8 x 6.0	19.5	35mm	M25

APPROVAL DETAILS:

ATEX	- CML 19ATEX3385, CML 19ATEX3386
IECEX	- CML 19.0128, CML 19.0129
DNV	- TAE00002KC
EAC	- EA3C RU C-GB.HA65.B.01383/22
UKEX	- CML 21UKEX31143, CML UKEX31145
*CCC	- 2020312312000120

ORDERING INFORMATION:

Example: **75 FSU 2 - N F**

Output 75W/m at 10°C _____

FSU Heating Cable _____

Supply Voltage 220 - 277V AC/DC _____

Metal Braid _____

Outer Sheath, Fluoropolymer _____

ACCESSORIES:

Heat Trace supply a complete range of accessories including termination/splice kits, end seals, junction boxes and controls. Such items carry separate approvals from the heating cables. Use only approved components, as per system certification.

FURTHER INFORMATION:

Please consult the appropriate termination instructions and the Heat Trace Design, Installation and Maintenance Manual (HTDIMM 010) for further details.

INGRESS PROTECTION: IP67

ATEX, IECEX & UKEX MARKINGS:

⊕ II 2 GD
Ex 60079-30-1 IIC T3 or T2# Gb
Ex 60079-30-1 IIC T200°C or T300°C Db
EN 60079-0: 2018
EN 60079-30-1: 2017

*denotes FSU only.

MAXIMUM LENGTH (m) vs. CIRCUIT BREAKER SIZE:

The following circuit details relate specifically for the trace heating of pipework and equipment. For any other application consult Heat Trace.


Cat Reference	Environmental Start-up Temp.	10A	16A	230V 20A	32A	50A
15FSU	10°C	76	122	154	172	172
	0°C	70	112	140	172	172
	-20°C	62	98	122	172	172
	-40°C	52	82	102	164	172
30FSU	10°C	52	82	102	122	122
	0°C	46	74	92	122	122
	-20°C	40	66	82	122	122
	-40°C	34	54	68	110	122
45FSU	10°C	38	62	76	100	100
	0°C	34	56	70	100	100
	-20°C	30	50	62	98	100
	-40°C	22	34	44	70	100
60FSU	10°C	30	50	62	86	86
	0°C	28	44	56	86	86
	-20°C	20	32	40	62	86
	-40°C	12	18	24	38	60
75FSU	10°C	22	34	44	70	76
	0°C	16	26	34	54	76
	-20°C	12	18	24	38	60
	-40°C	8	12	14	22	36
100FSUw	10°C	18	30	36	58	84
	0°C	18	28	34	56	84
	-20°C	16	24	30	50	76
	-40°C	14	22	28	46	70

For use with Type C circuit breakers to IEC 60898

These circuit lengths may be exceeded dependant on specific design parameters.

THERMAL RATINGS:

Nominal output at 230V when FSU is installed on thermally insulated carbon steel pipes.

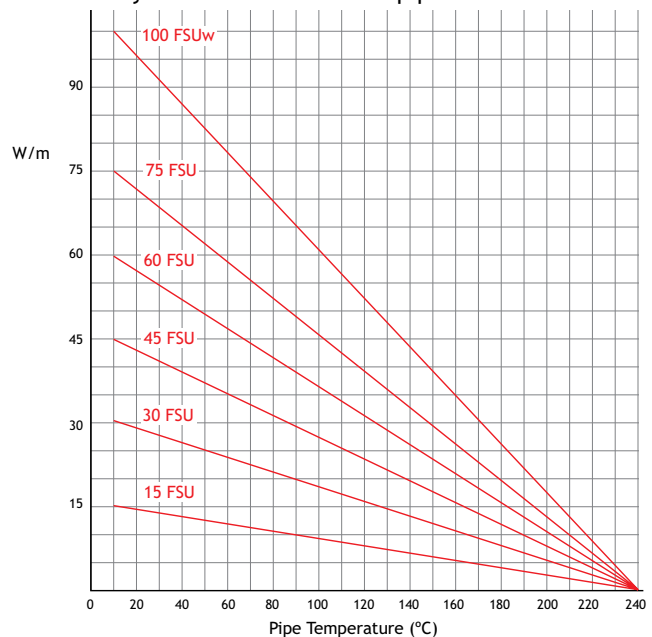

P.G.R. PARTNERS

P.G.R. Partners
Vilvoordsesteenweg 420, 1850, Grimbergen
Tel: 0032 2 705 52 51 - www.pgr.be - Email: info@pgr.be